THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2009
© COPYRIGHT 2009 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
IK	2

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	L2	DWG HAS BEEN UPDATED	03-Aug-09	JG	JS
	L3	DESCRIPTION Cat.6 was Class Ea	26-Oct-09	JG	JS
	–	–	–	–	–
	–	–	–	–	–

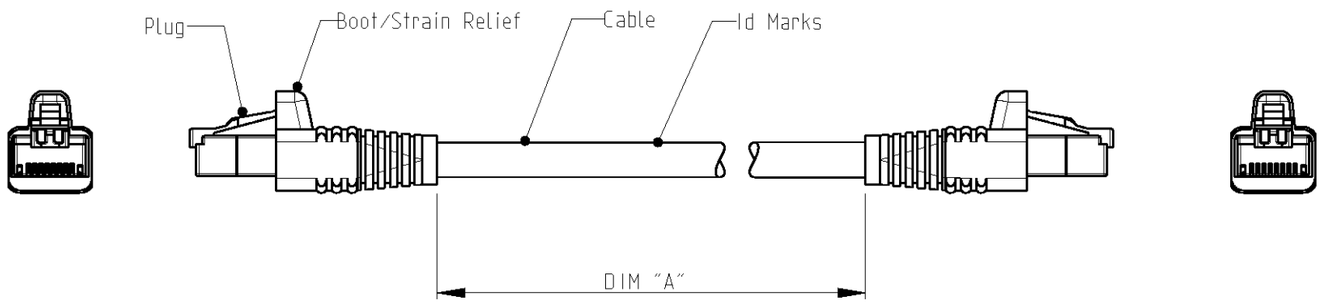

SCHEMATIC VIEW

1. RJ45 Cat.6 PATCH CABLE ASSEMBLIES ARE USED AS PATCH LEADS IN GENERIC CUSTOMER PREMISES CABLING ACCORDING TO ISO/IEC 11801. THEY CAN ALSO BE USED AS WORKSTATION/EQUIPMENT LEADS TO MAINTAIN CHANNEL PERFORMANCE.

2. FOR AVAILABLE DASH LENGTHS, DIM A SEE THE TYCO LECTRONICS CATALOG

THIS DRAWING IS A CONTROLLED DOCUMENT FOR Tyco ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±–
1 PLC ±–
2 PLC ±–
3 PLC ±–
4 PLC ±–
ANGLES ±–

MATERIAL –
FINISH –

DWN J.GATNAU 03-Aug-09
CHK M.MAQUEDA 03-Aug-09
APVD J.SANABRA 03-Aug-09
PRODUCT SPEC 108-93010
APPLICATION SPEC –
WEIGHT –

Tyco Electronics
tyco Electronics AMP España, S.A.
Barcelona. Spain.

NAME
PATCH CORD RJ45 Cat.6 S/FTP PIMF600 LSZH STRANDED WHITE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	–	C-959385	–

CUSTOMER DRAWING | SCALE – | SHEET 1 OF 1 | REV L3